


RY SERİSİ YAĞ SOĞUTMA EŞANJÖRLERİ

10 09 2008

S.N. YSE-0002

Model		RY 06	RY 10	RY 12	RY 14	RY 18	RY 25	RY 30	RY 35	RY 40
Nominal Kapasite	kcal/h	5.600	10.000	12.000	14.000	18.000	25.000	30.000	35.000	40.000
55 C Yağ - 20 C H2O	kW	6,51	11,63	13,95	16,28	20,93	29,07	34,88	40,70	46,51
Maksimum Kapasite	kcal/h	7.280	13.000	15.600	18.200	23.400	32.500	39.000	45.500	52.000
55 C Yağ - 10 C H2O	kW	8,47	15,12	18,14	21,16	27,21	37,79	45,35	52,91	60,47
Yüzey Alanı	m ²	0,31	0,56	0,67	0,78	1,00	1,39	1,67	1,94	2,22
Yağ Debisi (min-max.)	l / dkk	30-90	30-90	30-90	30-90	40-120	50-150	80-220	120-280	120-300
Maks. Su Debisi	m ³ /h	1,30	2,33	2,79	3,26	4,19	5,81	6,98	8,14	9,30
Enjeksiyon Pratik Seçim		20-70	60-150	70-180	70-250	100-300	150-450	150-550	200-650	250-750

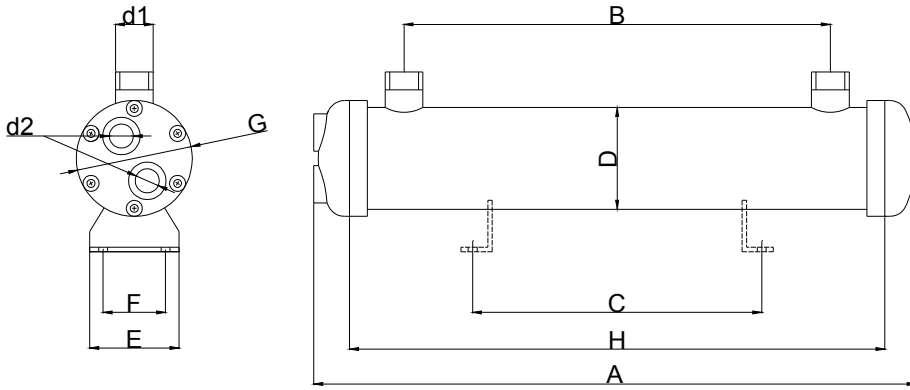

BOYUTLAR		RY 06	RY 10	RY 12	RY 14	RY 18	RY 25	RY 30	RY 35	RY 40
A	mm	325	500	585	675	835	690	800	920	1040
B	mm	140	315	400	490	650	470	580	700	820
C	mm	125	210	255	300	380	300	365	415	475
D	mm	114,3	114,3	114,3	114,3	114,3	141,3	141,3	141,3	141,3
E	mm	100	100	100	100	100	130	130	130	130
F	mm	60	60	60	60	60	90	90	90	90
G	mm	130	130	130	130	130	152	152	152	152
H	mm	250	425	510	600	760	600	710	830	950
d1	inch	1	1	1	1	1	1 1/2	1 1/2	1 1/2	1 1/2
d2	inch	3/4	3/4	3/4	3/4	3/4	1 1/4	1 1/4	1 1/4	1 1/4



10 09 2008

S.N. YSE-0002